





## 一、 Product Scope

The products shall be applied to the light control system. According to the different needs, the products can be fixed install. The item GJ02(073020) can be installed in the distribution box which can be operated by hand too.

### 1、 Table for models


Art-Nr.	Code.	Mode	Contact movement order				Contact Power	
			1°	2°	3°	4°	Rated Voltage	Rated Current
073210	GJ-01/01	2					250V AC	10A
073020	GJ-02/01	2					250V AC	16A

### 2、 Parameters for coil (Rated voltage of coil can be tailored as per requests)



Art-Nr.	Code.	Rated Voltage	DC resistance	Working current
073210	GJ-01/01	230V AC	6.4K $\Omega$	20mA
073020	GJ-02/01	230V AC	2.1K $\Omega$	39 mA

## 二、 Installation dimension

### 1、 GJ-01/01 (Art-Nr.073210)

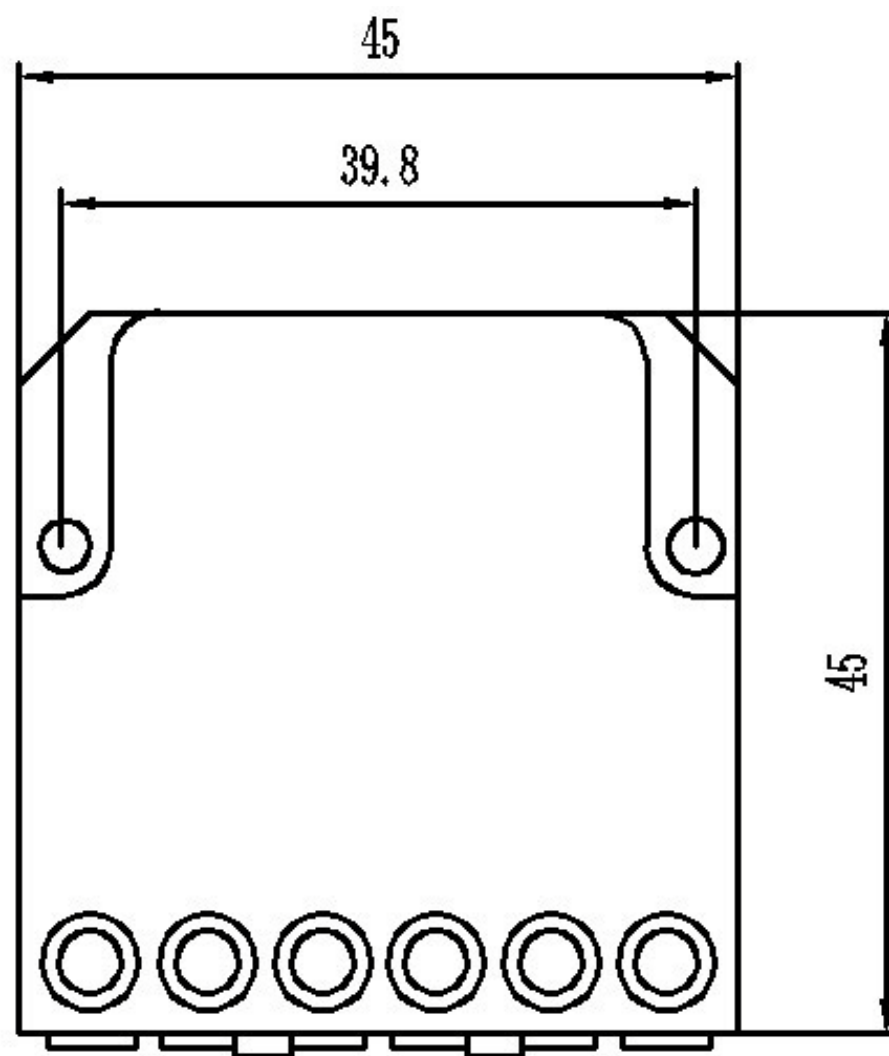

2、 GJ-02/01(Art-Nr.073020)

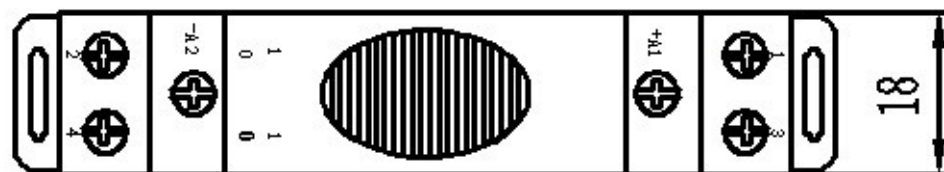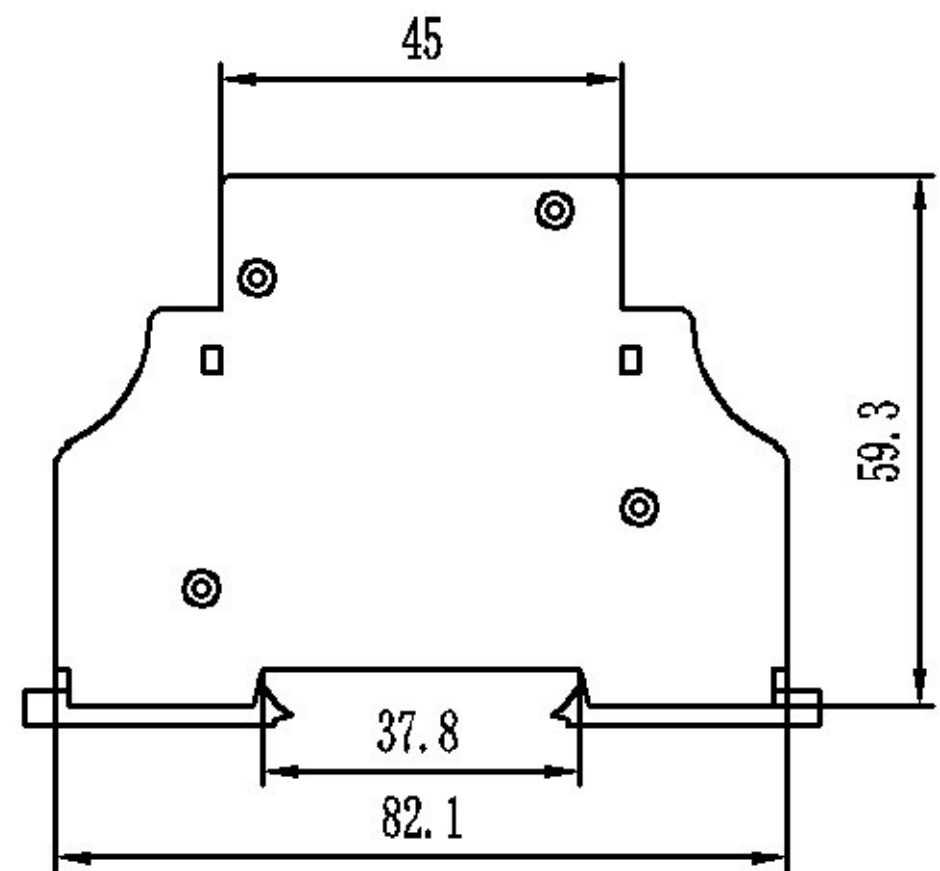

### 三、 Wiring Diagram

#### 1、 GJ-01/01(Art-Nr.073210)

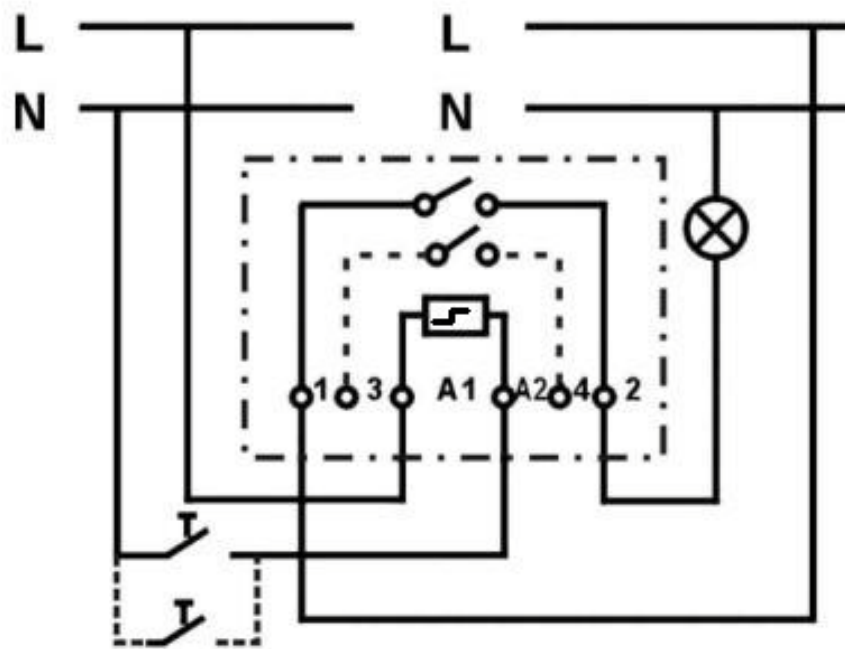


Fig.1



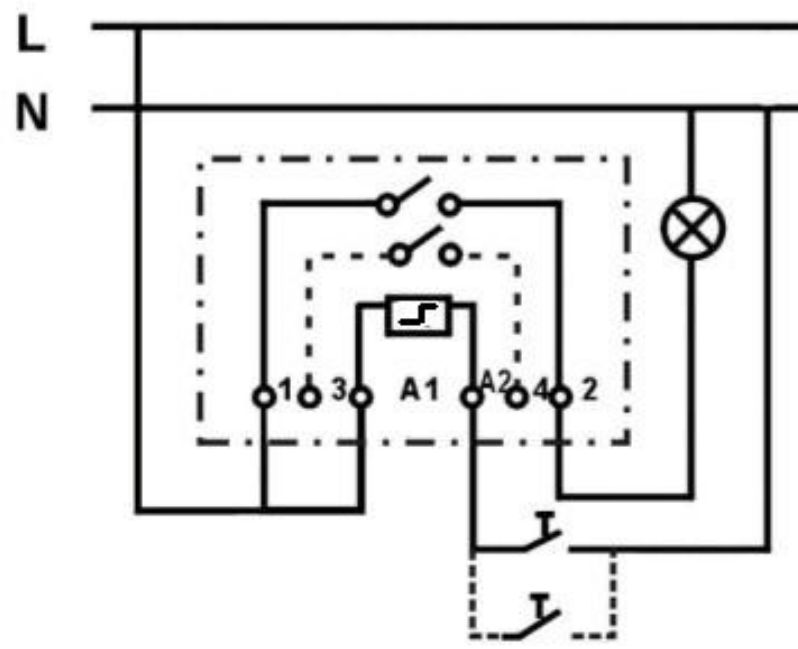


Fig.2

## 2、 GJ-02/01(Art-Nr.073020)

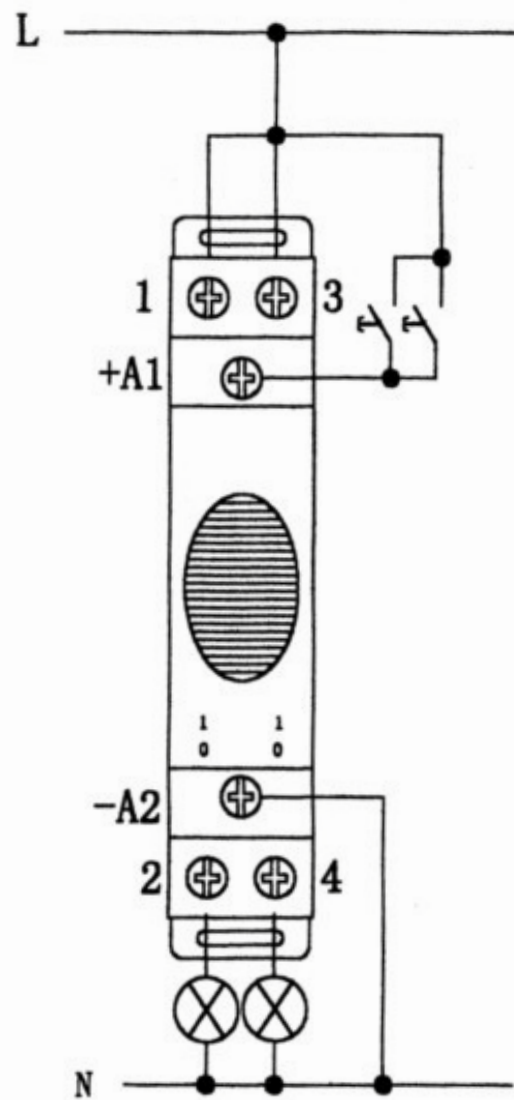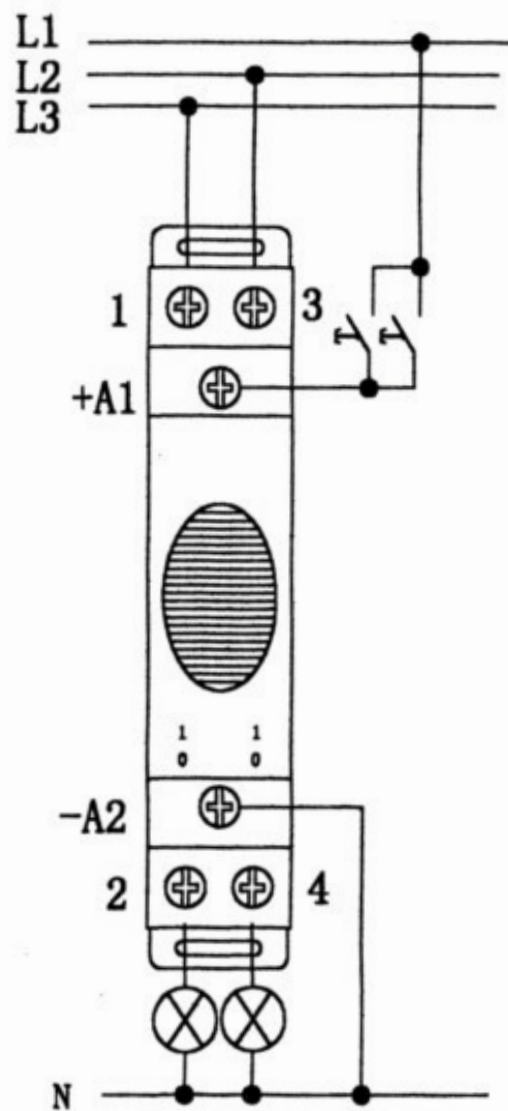

#### **四、 Remarks**

- 1、 Products cannot be installed in the moisture surrounding or outdoor.**
- 2、 Installation must be made by specialized electrician as per above wiring diagram.**

#### **Warning:**

**The controlling switch for above products should be NORMAL OPEN RESET SWITCH. The NORMAL CLOSE SWITCH OR NORMAL OPEN SELF-LOCKED SWITCH are forbidden to be used!**