


ELIA FL

GEWISS

FLOODLIGHT LED



CE

IP66

0,3m

200W

RG1→0,2m

RG0→6,6m

+50°C


-30°C

t_a


+50°C

	50W	2,6	0.013 m²	0.05 m²
	100W	3,9	0.022 m²	0.1 m²
	150W	4,5	0.024 m²	0.12 m²
	200W	6,3	0.03 m²	0.15 m²


		V
	ON-OFF	100-240 V 50/60 Hz
	DALI	220-240 V 50/60 Hz

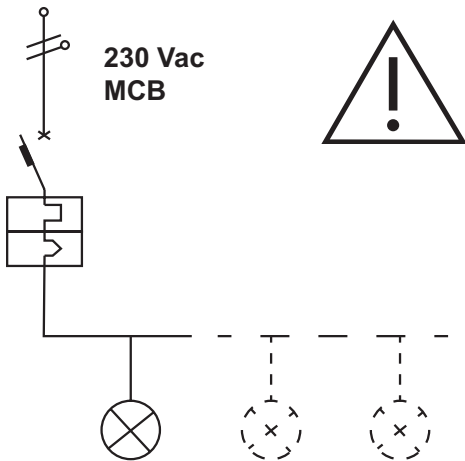

MCB Type C:		10A	16A	20A
50W	ON-OFF	Max n.10	Max n.40	Max n.20
	DALI	Max n.3	Max n.6	Max n.7
100W	ON-OFF	Max n.4	Max n.16	Max n.9
	DALI	Max n.3	Max n.6	Max n.7
150W	ON-OFF	Max n.4	Max n.10	Max n.8
	DALI	Max n.3	Max n.6	Max n.7
200W	ON-OFF	Max n.4	Max n.9	Max n.7
	DALI	Max n.4	Max n.6	Max n.8

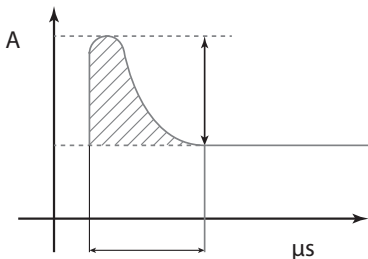


Inrush current peak and width:		
50W	ON-OFF	45A / 100μS
100W	ON-OFF	70A / 200μS
	DALI	60A / 850μS
150W	ON-OFF	110A / 200μS
	DALI	65A / 550μS
200W	ON-OFF	120A / 200μS
	DALI	60A / 510μS

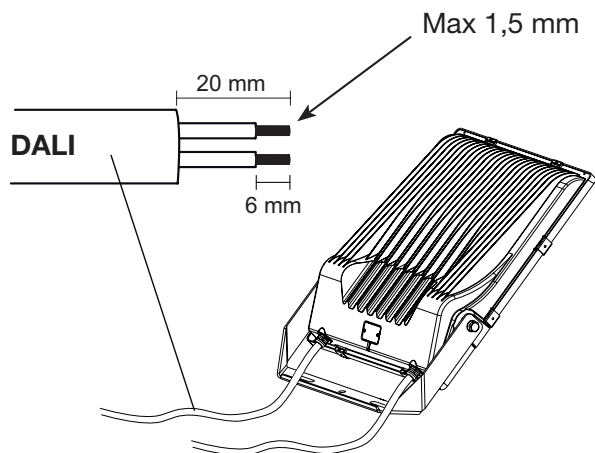


L
N
⊕
DALI 1
DALI 2


	DALI	STAND-ALONE
50W	✗	✓
100W	✓	✓
150W	✓	✓
200W	✓	✓

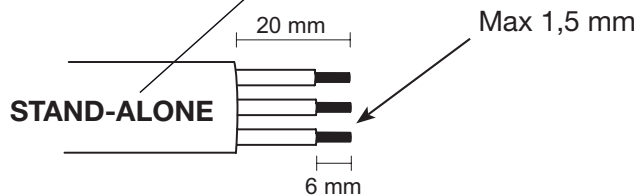


L
N
⊕





50W

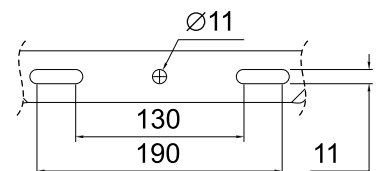


100W/150W

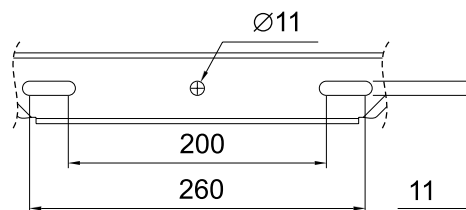


200W






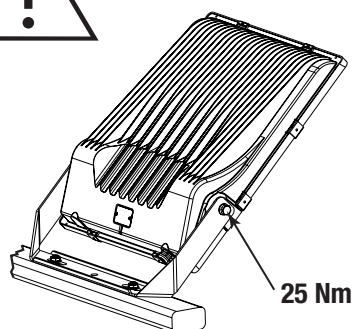
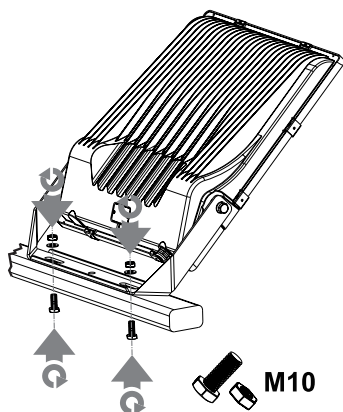


25 Nm

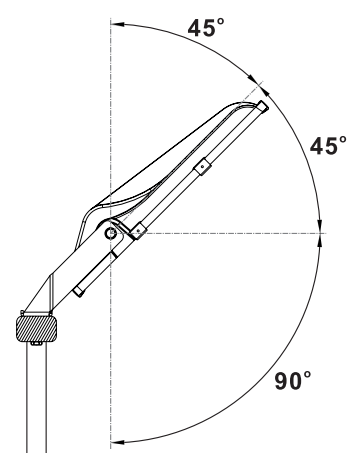



GW F1 901

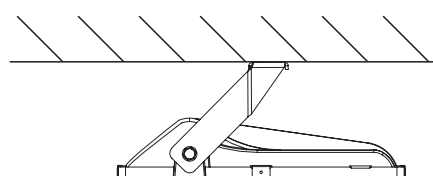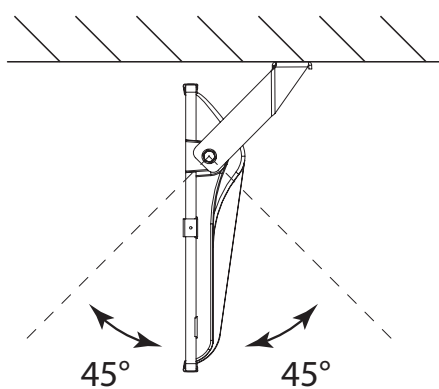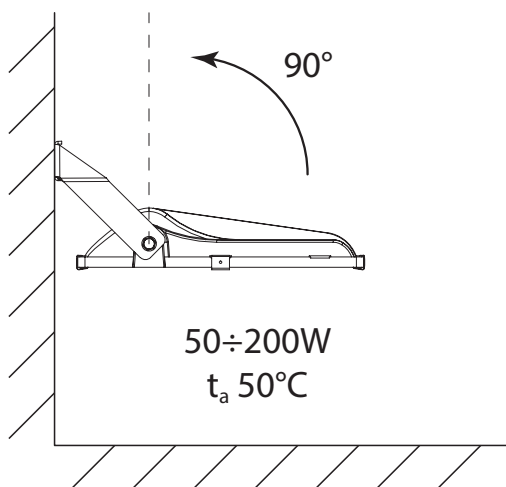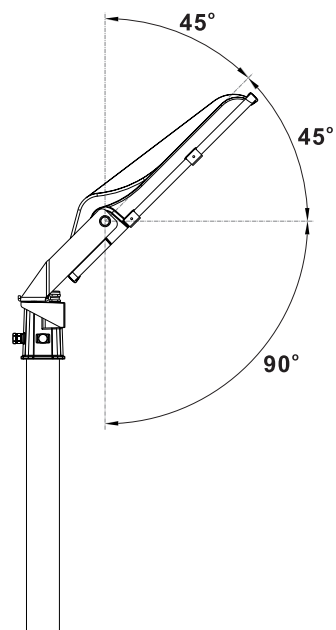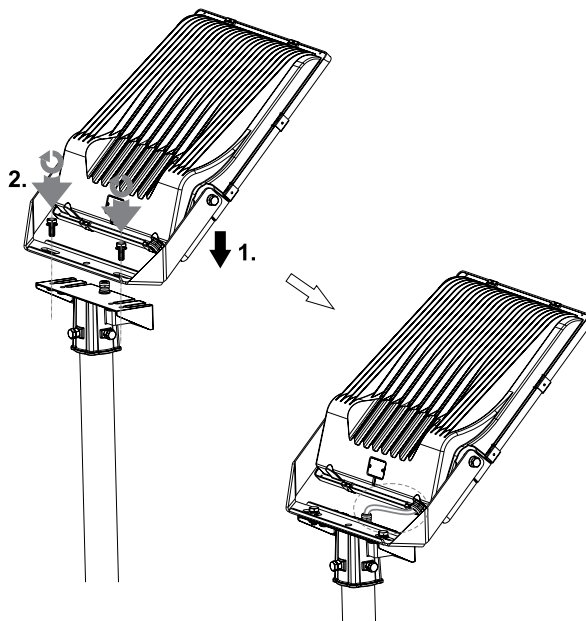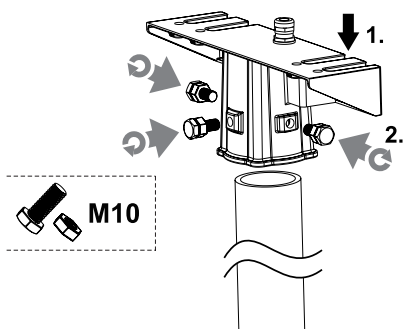








50÷200W
 t_a 50°C

50÷150W

t_a 50°C

200W

MAX t_a 40°C

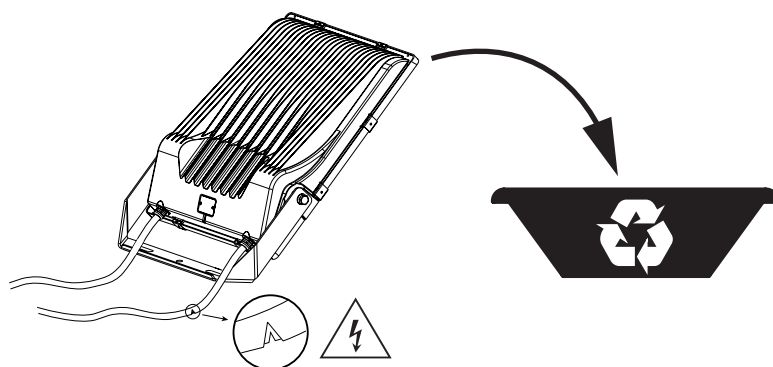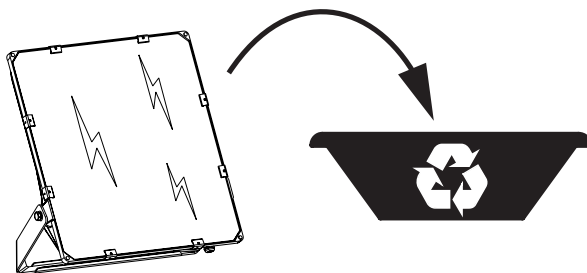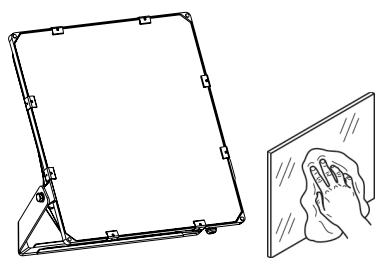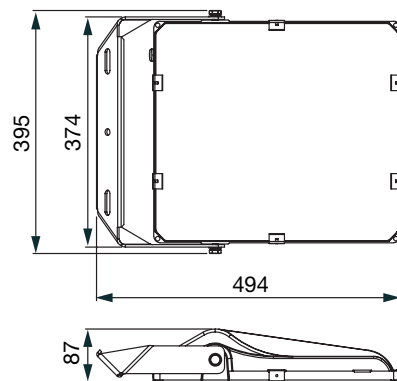**S2****M2****L2****XL2**

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com