
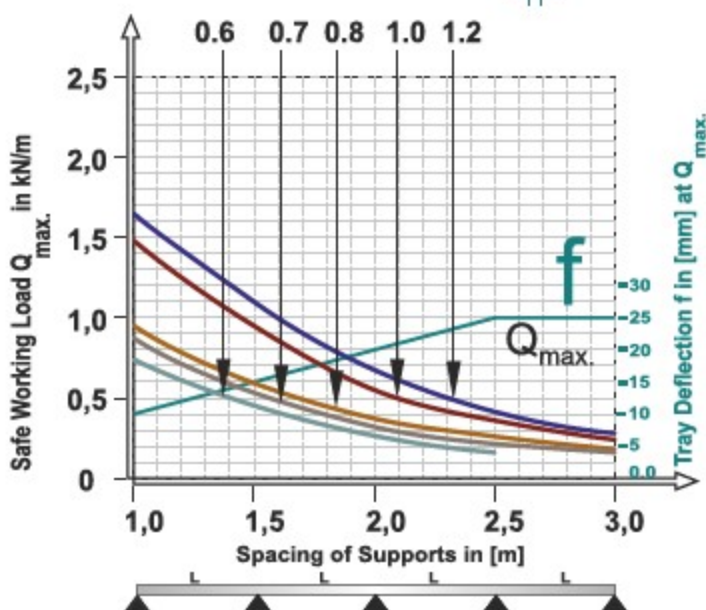


FPK H40

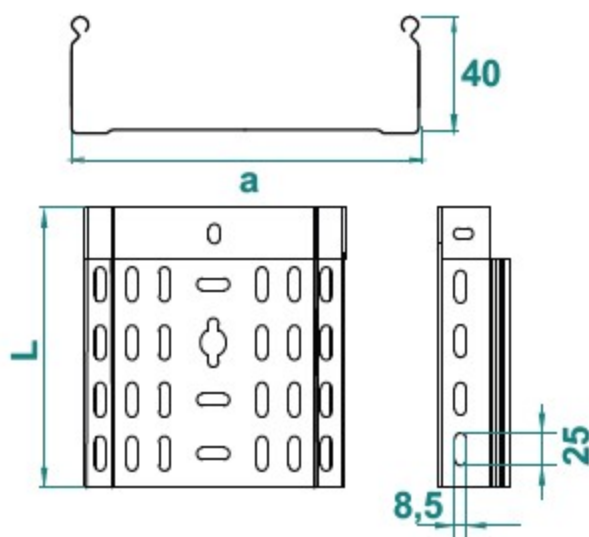

Width	Usable Cross-Section
50	18 cm ²
100	38 cm ²
150	58 cm ²
200	78 cm ²
300	118 cm ²
400	158 cm ²
500	198 cm ²
600	238 cm ²

This diagram comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span

Q = max. admissible load (kg/m)

L = support distance (m)

f = Deflection (mm) / Max. deflection = $L/100$

Safety co-efficient = 1.5

APPLICATIONS

Cable routing

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)

Available finishes:

HDG-steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]:

0.6 0.8 1.0 1.2