
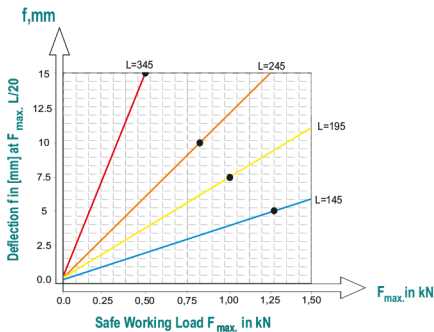



DKL

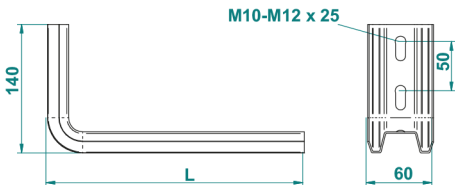

APPLICATIONS

Cable routing / Standard : IEC 61537

Available finishes:

Steel, hot-dip galv. to TS-EN ISO 1461:2011 (HDG)

PG- Steel, strip-galv. acc. to the Sendzimir method to TS-EN 10346:2011 (PG)

SS- stainless steel AISI 304L and AISI 316L (SS)

EP- powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **2.0**