

Tabla cutata H12



Produs:

Tabla cutata H12 – Tabla cutata din table de otel prevopsit sau otel zincat.

Domeniu de utilizare:

- ✓ Acoperisuri si fatade
- ✓ Compartimentari
- ✓ Imprejmuiri

Caracteristici:

- ✓ Usor de instalat
- ✓ Set de scule uzual necesar instalarii
- ✓ Usor de manipulat si transportat

Standarde Europene:

EN 14782:2006 si EN 508-1 / EN 505-2

Comprtament la foc:

Reactie la foc: Class A1

Performanta la foc exterior: Class Broof (t1), Broof (t2), Broof (t3), Broof (t4)

Rezistenta mecanica:

1.2 kN la deschidere de 400 mm.


Accesorii:

Lungimi 1, 2 m

Latimi desfasurate: Cornier de margine 200mm, Coama dreapta 250 mm,

Sort de streasina 156 mm

Materie prima	Otel zincat prevopsit Aluminiu prevopsit
Marca de otel Aliaj de aluminiu	S220GD H 45
Grosime	Otel: 0.40 – 0.55 mm Aluminiu: 0.60 – 0.70 mm
Protectie anticoroziva g/m ²	225 – 275 Zn 120 AlZn 120 ZnMg
Latime totala	910 / 1142 mm
Latime utila	847 / 1089 mm
Inaltime profil	12 mm
Distanta de sipcure	400 mm
Panta minima	14°

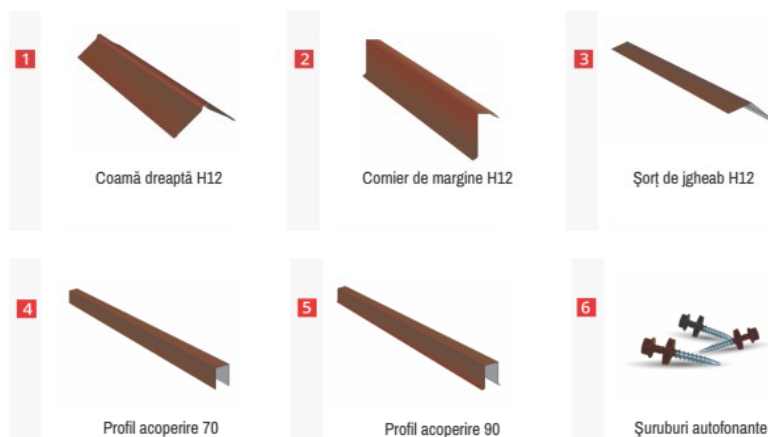

Otel Grosime / Caracteristici	0.40 mm			0.45 mm				
Tip finisaj	SunClear	SandShape	Printech	MagneZinc	SunClear	Mattfin	Sandshape	Printech 35
Protectie anticoroziva (g/m ²)	225-275 Zn	225-275 Zn	120 AlZn	ZnMg 120	225 Zn	225 Zn	225 Zn	120 AlZn
Grosime vopsea (µm)	35	35	35	-	35	35	35	35
Culori RAL	3009, 3011, 7016, 8017, 8019, 9005	3011, 7016, 8017, 8019, 9005	Chamouflage, Multigloss Nuc	-	3009, 3011, 8017	3011, 8004	8017, 8019	Lemn Multigloss
Garantie	10	10	25	20	15	15	15	15
Durata de viata	40	40	100	100	60	60	60	60
Cod Produs	BRVH12SL0402			BRVH12SL0452				

Otel Grosime / Caracteristici	0.50 mm						0.55 mm
Tip finisaj	Zinc	MagneZinc	SunClear	SandShape	BigStone	Printech 35	BigStone
Protectie anticoroziva (g/m ²)	275 Zn	120 ZnMg	225-275 Zn	275 Zn	275 Zn	120 Zn	275 Zn
Grosime vopsea (µm)	-	-	35	35	40	35	35
Culori RAL	-	-	3009, 3011, 7016, 8017, 9002, 9005, 9006	3011, 7016, 8017, 8019, 9005	3005, 3009, 6005, 7024, 8017, 8019, 9005	Lemn Nuc	8019, 9005
Garantie	5	20	20	20	25	15	25
Durata de viata	40	100	80	80	100	60	100
Cod Produs	BRVH12SL0502						

Aluminiu Grosime / Caracteristici	0.60 mm	0.70 mm	
Tip finisaj	Embosat	SunClear SS	SunClear DS
Protectie anticoroziva (g/m ²)	-	-	-
Grosime vopsea (µm)	20+20	20+10	20+20
Culori RAL	7016, 8019	7016, 8019, 9010	7016, Natur, Golden Oak
Garantie	20	20	20
Durata de viata	100	100	100
Cod Produs	BRVH12SL0502		