


Tabla cutata H18

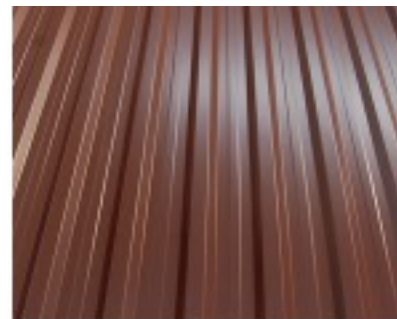

Produs:

Tabla cutata H12 – Tabla cutata din table de otel prevopsit sau otel zincat.

Domeniu de utilizare:

- ✓ Acoperisuri si fatade
- ✓ Compartimentari
- ✓ Imprejmuiri

Caracteristici:

- ✓ Usor de instalat
- ✓ Set de scule uzual necesar instalarii
- ✓ Usor de manipulat si transportat

Standarde Europene:

EN 14782:2006 si EN 508-1

Comprtament la foc:

Reactie la foc: Class A1

Performanta la foc exterior: Class Broof (t1), Broof (t2), Broof (t3), Broof (t4)

Rezistenta mecanica:

1.2 kN la deschidere de 400 mm.


Accesorii:

Lungimi 1, 2 m

Latimi desfasurate: Cornier de margine 200mm, Coama dreapta 250 mm,

Sort de streasina 156 mm

Materie prima	Otel zincat prevopsit
Marca de otel	S220GD
Aliaj de aluminiu	
Grosime	Otel: 0.50 mm
Protectie anticoroziva	225 – 275 Zn
Latime totala	1140 mm
Latime utila	1085 mm
Inaltime profil	18 mm
Distanta de sipcure	400 mm
Panta minima	14°

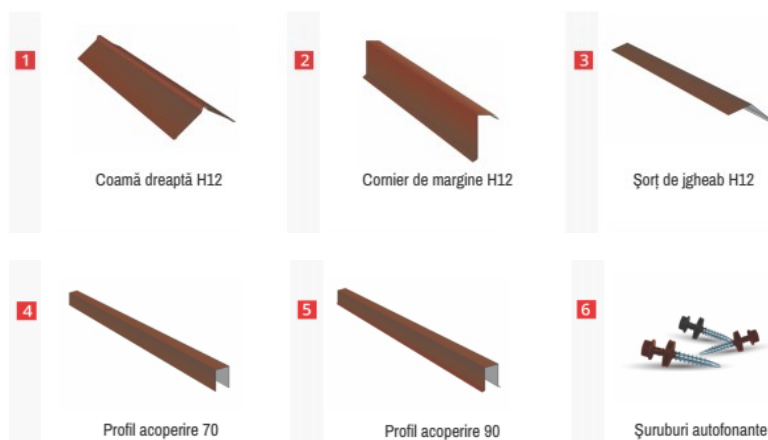

Otel Grosime / Caracteristici	0.50 mm					
Tip finisaj	Zinc	MagneZinc	SunClear	SandShape	BigStone	Printech 35
Protectie anticoroziva (g/m ²)	275 Zn	120 ZnMg	225-275 Zn	275 Zn	275 Zn	120 Zn
Grosime vopsea (µm)	-	-	35	35	40	35
Culori RAL	-	-	3009, 3011, 7016, 8017, 9002, 9005, 9006	3011, 7016, 8017, 8019, 9005	3005, 3009, 6005, 7024, 8017, 8019, 9005	Lemn Nuc
Garantie	5	20	20	20	30	15
Durata de viata	40	100	80	80	100	60
Cod Produs						