

品名

鑽尾螺絲 六角華司頭,雙段牙 #5 號尾 C牙,滾牙三線 割邊,頭部記號凸字"SD"

圖號:


SM-Su6. 3/5. 5xL

DESCRIPTION

IND H/W/H.U/C S/D/S,T-CSD #5 POINT W/3 NOTCHES AND SHANK SLOT FULL THREAD MARK RAISED"SD".


客戶

凸標

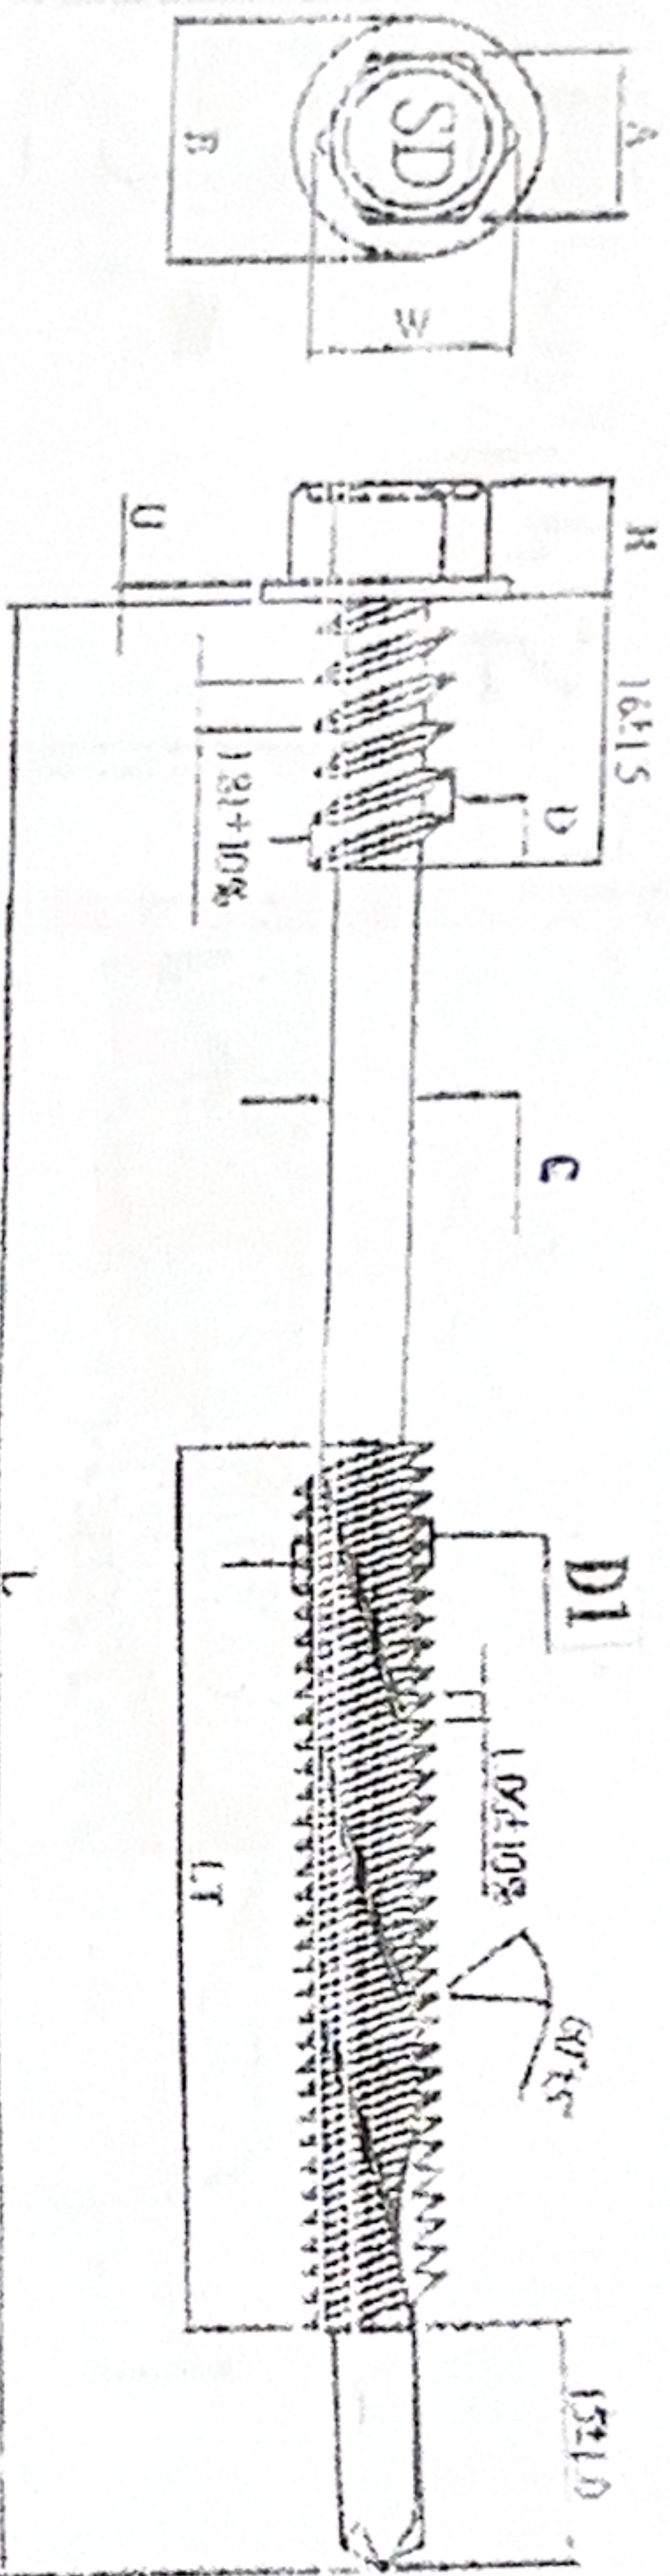

Notes:

- 1.Materials(材質):C1022
- 2.Surface Hardness(表面硬度):HV0.3 560 Min
- 3.Core Hardness(心部硬度):HV0.3 300~420
- 5.Torsional Strength(扭力強度):Min 100 Kg-cm
- 6.Drill-Drive Test(攻速測試):Max loading36kg through 12.0mm steel plate(鐵板),

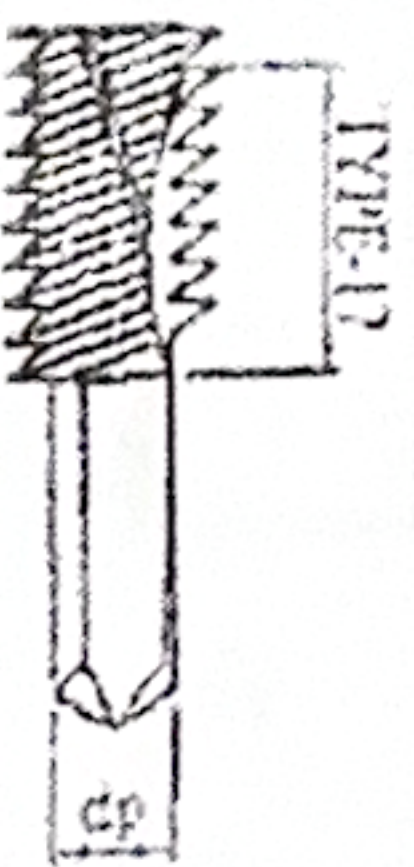

公稱	SIZE	B	A	W	H	U	D	D1	dp	c				
	Max	10.00	7.78	8.71	5.15	Min	6.10	5.26	4.85					
M6. 3/5. 5xL	Min	11.00	8.00	min	5.45	1.00	6.25	5.48	5.15	4.70				
	Nominal length	L	70mm	80mm	90mm	100mm	110mm	120mm	130mm	150mm	180mm	200mm	230mm	280mm
Thread length	Max	32.00	37.00	42.00	42.00	67.00	67.00	72.00	72.00	72.00	72.00	72.00	72.00	72.00
	LT	Min	28.00	33.00	38.00	38.00	63.00	63.00	68.00	68.00	68.00	68.00	68.00	68.00

Nominal length:L:70 to 280 mm incl. +/1.50mm

Approve

Check

Draft

Unit

mm

Date

113.11.22

Confirm