


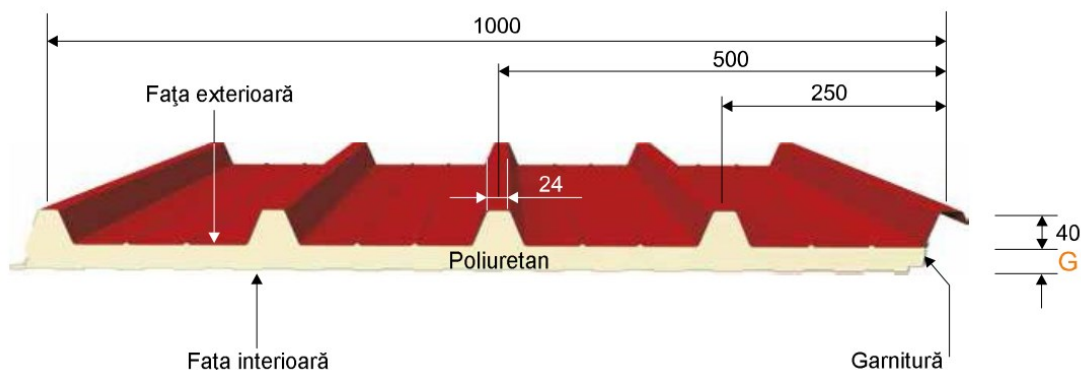

Panou metalic **Top Roof C5 40**

Panou metalic autoportant cu miez termoizolant din poliuretan, cu cinci cute

Domeniu de utilizare:

- ✓ Acoperisuri

Caracteristici:

- ✓ Usor de instalat
- ✓ Set de scule uzual necesar instalarii
- ✓ Usor de manipulat si transportat

Standarde Europene:

EN 14509:2013

Comprtament la foc:

Reactie la foc: NPD

Performanta la foc exterior: NPD

Rezistenta termica (R_{10}): 1.27 m²K/W

Conductivitate termica (λ_{10}): 0.0228 w/mk

Rezistenta la compresiune: (δ_{10}): 0.1345 Mpa

Materie prima (fete interior/exterior)	Otel zincat prevopsit
Marca de otel	S 220GD+Z100
Greutate	9.53 kg/m ²
Grosime tabla	0.40 mm
Miez termoizolant	Poliuretan 40 mm
Strat de vopsea	Poliester 25 μ m Lucios
Culori disponibile	9002
Latime utila	1000 mm
Inaltime profil	40 mm
Panta minima	7°
Garantie	3 ani pentru panourile montate la exterior; 5 ani pentru panourile montate la interior

AVANTAJE

20 de ani durata de viata

3/5 ani garantie

Greutate redusa, poate fi montata pe structuri diverse

Sistem de fixare economic

Rezistenta foarte buna la incercari mecanice

Manufacturer: **BRVO EUROPA S.R.L.**

55 Muncii St., Fundulea, 915200, Calarasi County, Romania
Tel: +(40) 37 202 406 ; Fax: +(40) 374 202 407
E-mail: office@bravo-europa.eu
Web: www.bravo-europa.eu

VAT No: RO29327702
Reg. Comm.: J51/269/2014
Bank: BCR, Theodor Pallady Branch
IBAN EUR: RO19RNCB0089140775130002
IBAN RON: RO48RNCB0089140775130001
IBAN USD: RO89RNCB0089140775130003

